



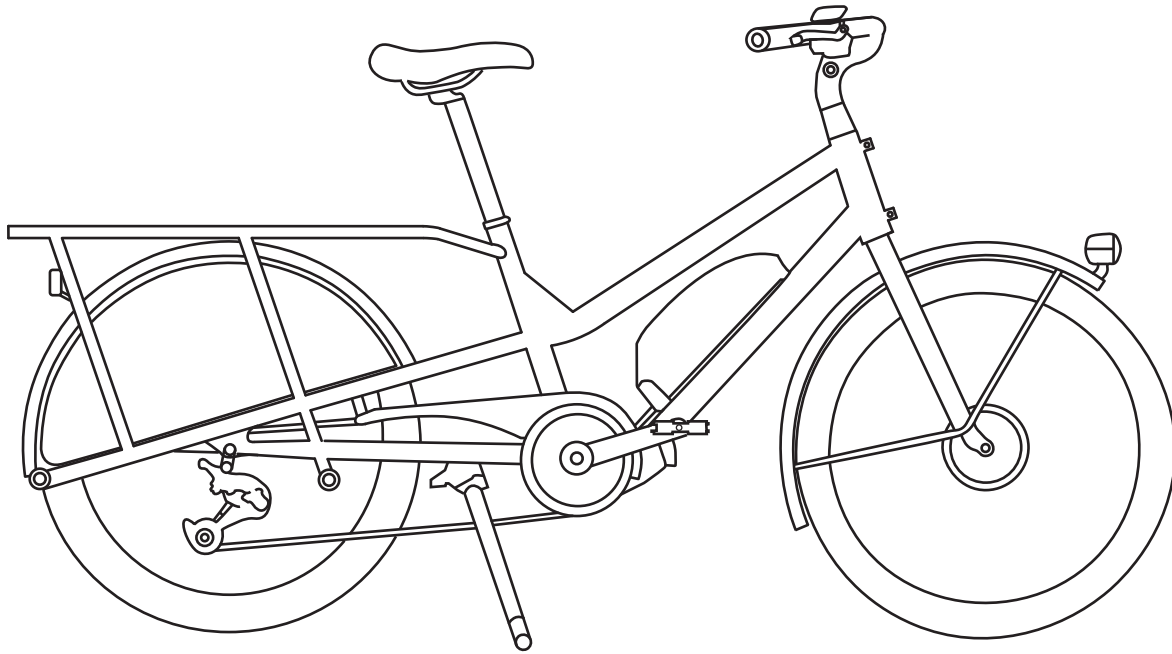

## Kombi EP5

Quick Start Guide




**Scan this QR code to  
view other languages**




## Before you start, you need

### INCLUDED

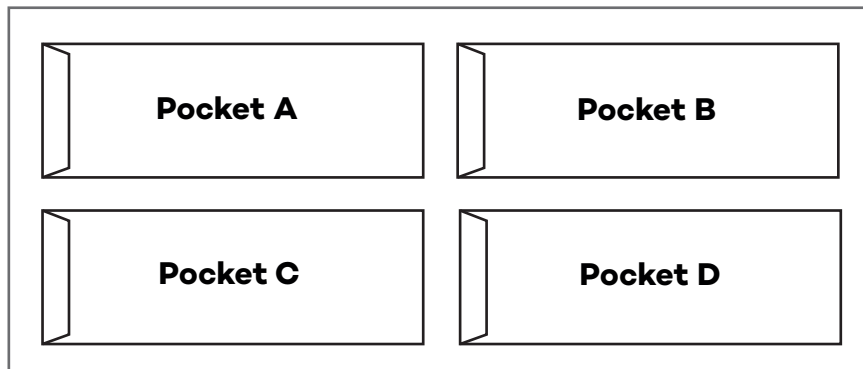


### NOT INCLUDED


#### Metric Allen Keys

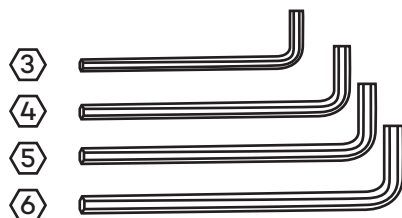

#### Metric Wrenches

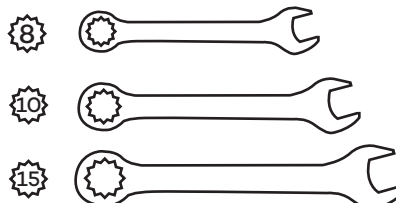


#### Needlenose Pliers



## For more information

<https://yubabikes.eu>

Check the  
assembly  
video




## Warning: Tightening torque




ALWAYS ENSURE TO USE THE CORRECT TORQUE.

A screw connection that is not tightened sufficiently may loosen, crack, or break due to vibrations and load stresses. Overtightening may stretch the threads or cause irreversible damage to the components.

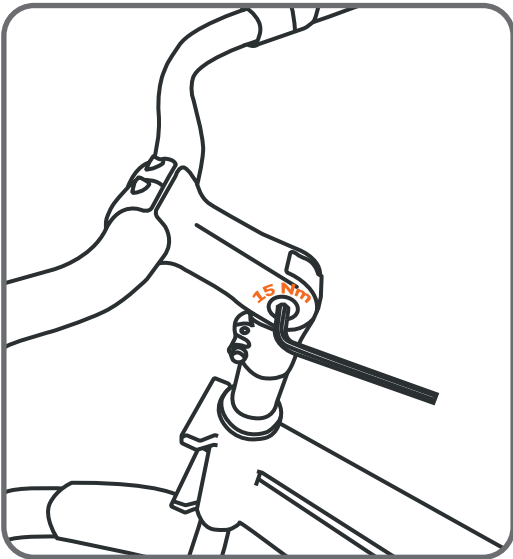

REFER TO YUBA BIKES USER MANUAL



CORRECT TORQUE VALUES ARE INDICATED DIRECTLY ON THE RESPECTIVE COMPONENT OR ON OUR USER MANUAL IN THE SECTION 3.A TIGHTENING TORQUE OF SCREW FITTINGS

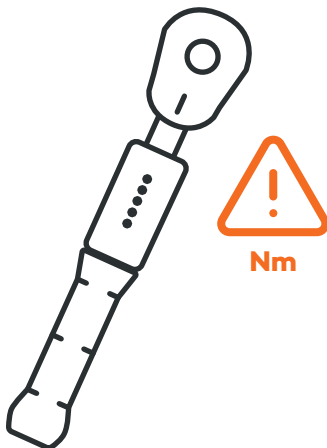

PLEASE ALWAYS USE TORQUE WRENCH

## Step 1: Install front wheel


Insert and secure front tire

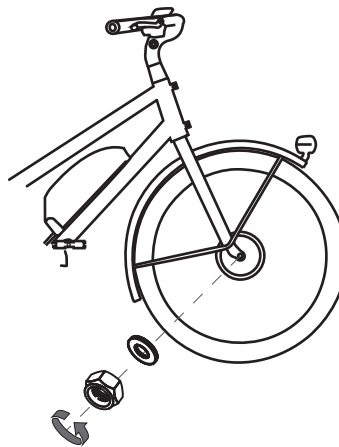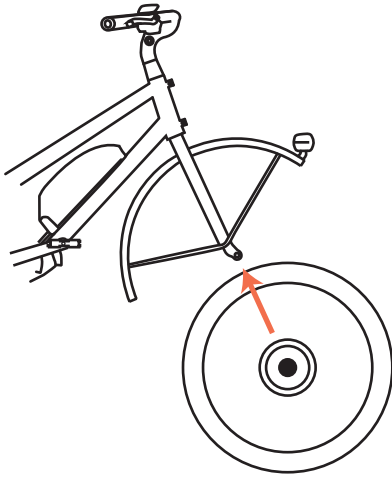

Nm

15 Torque: 25 Nm

## Step 2: Kickstand

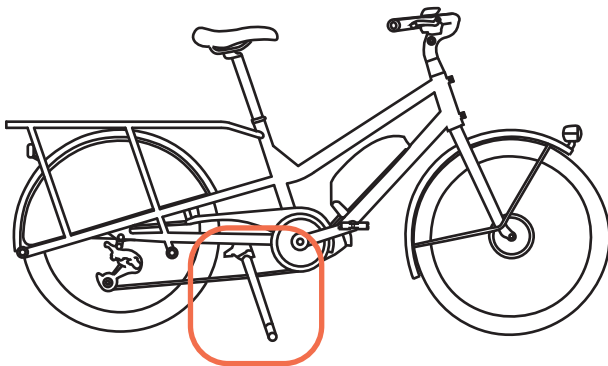


6

Torque: 20 Nm

The screws are already on the kickstand



Nm

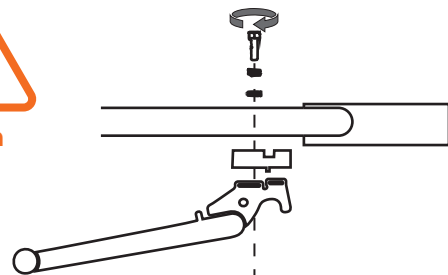


## Step 3: Handlebars

Install handlebars

4


Torque: 5 Nm

Screws are already mounted on the stem

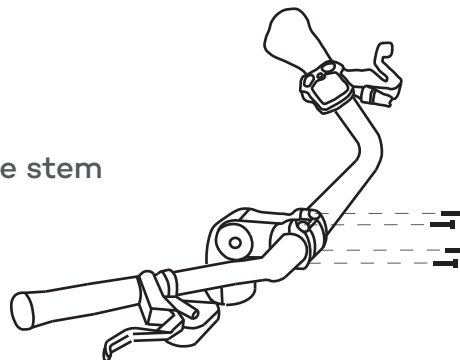

Nm

Tighten the screws to the correct torque in the following order


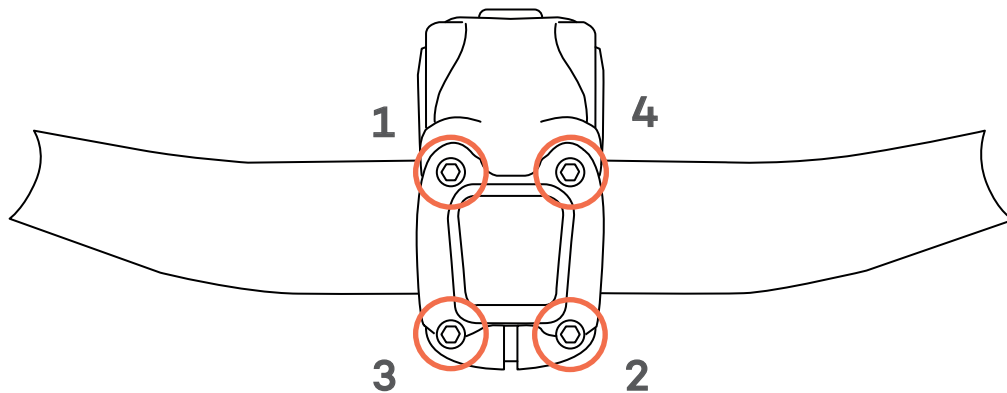


## Tighten the stem



Screws are already mounted on the stem at points 1 and 2

Check the stem is aligned with the wheel

Tighten screws at points 1 and 2

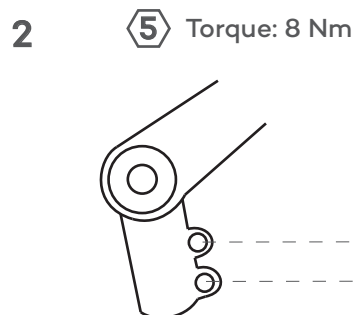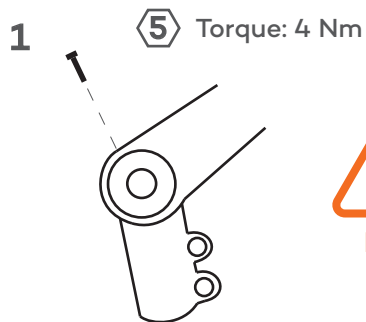


## Adjust stem angle

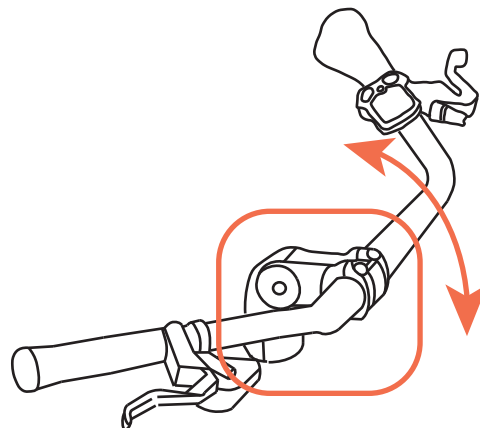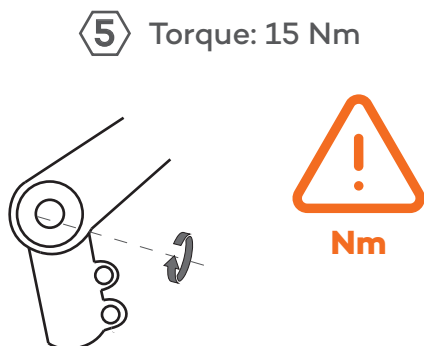

## Step 4: Front brake

### Front brake adjustment

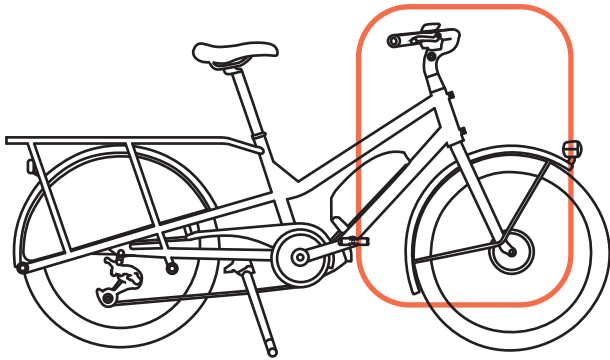


Install the front brake caliper

The screws are already mounted on the caliper

Make sure the hose is in line with the fork and pointing upwards



Mount the caliper bracket on the post mount support, but do not tighten it.

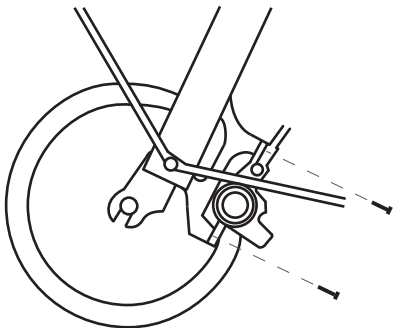

Remove the brake protection (yellow plastic part)

Pull the front brake



At the same time tighten the front caliper

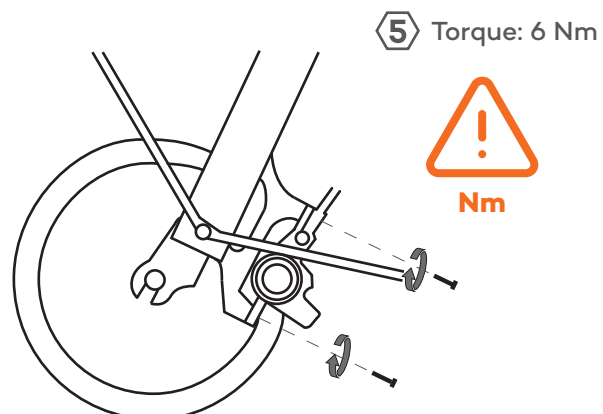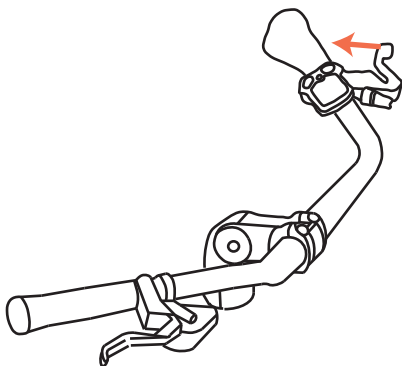

## Step 5: Front fender and deflopilator

### Install Front Fender and Deflopilator

Connect the light cable and push the extra cable into the frame

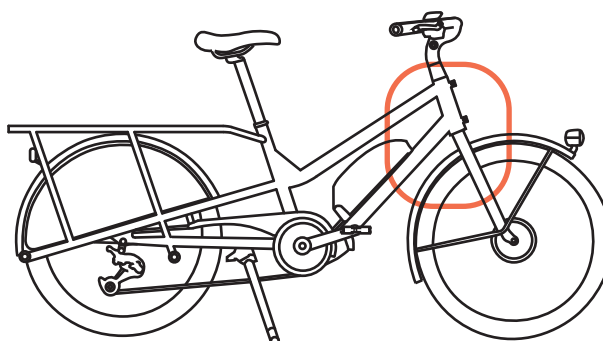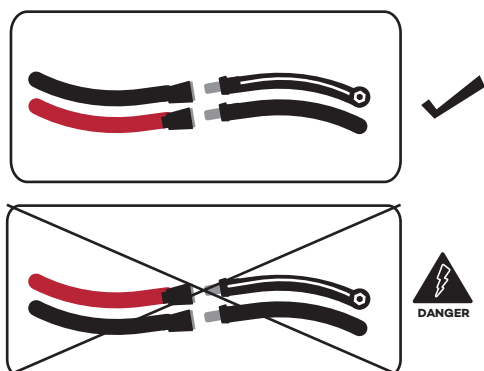

### Contents of each pocket


Pocket A




Pocket B




Pocket C

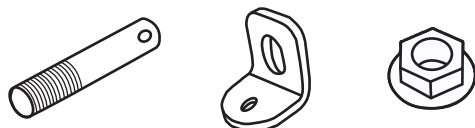


Pocket D

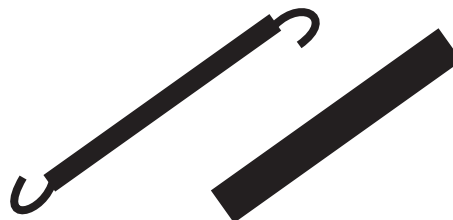


### Install the deflopilator mounting screw

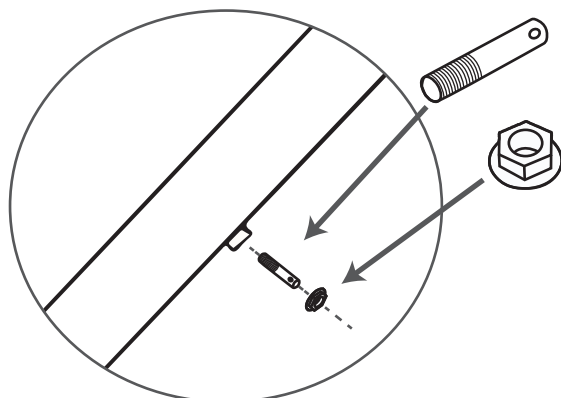

 Torque: 6 Nm

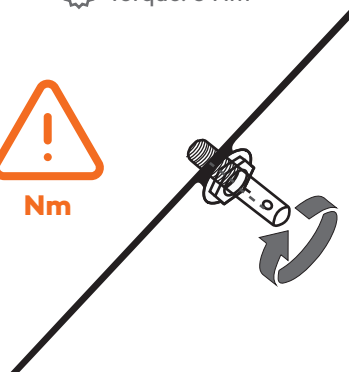





Make sure the front fender support are on the front of the fork

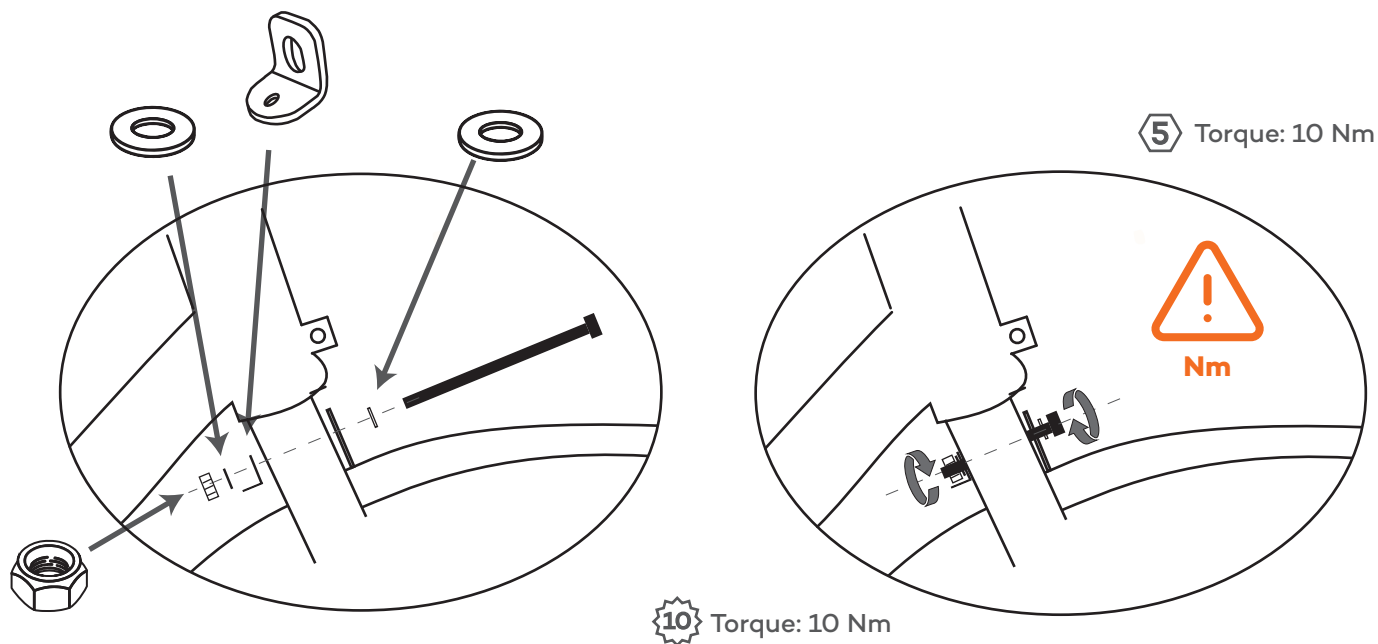



### Install Deflopilator spring



Use Needlenose pliers to elongate the spring and hook it in place

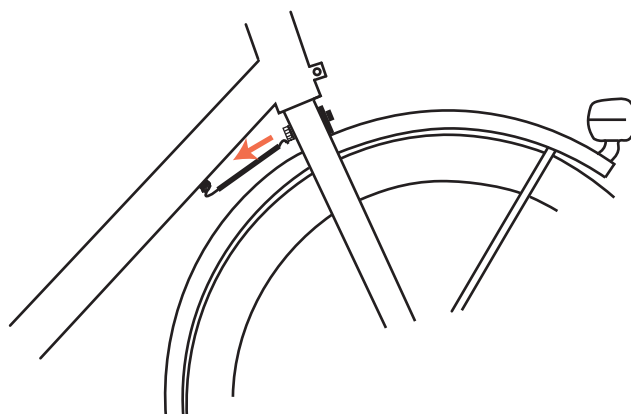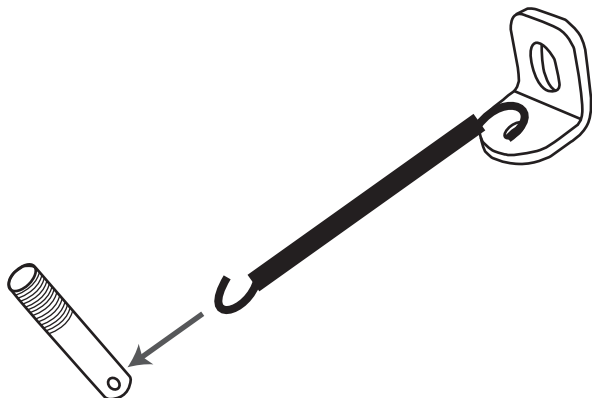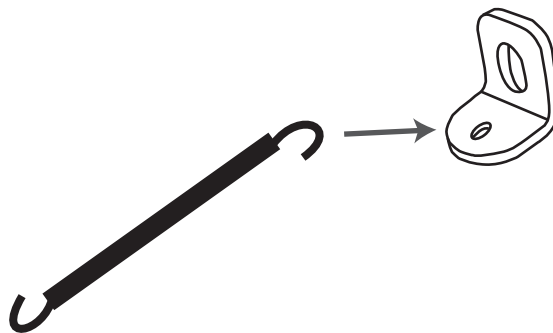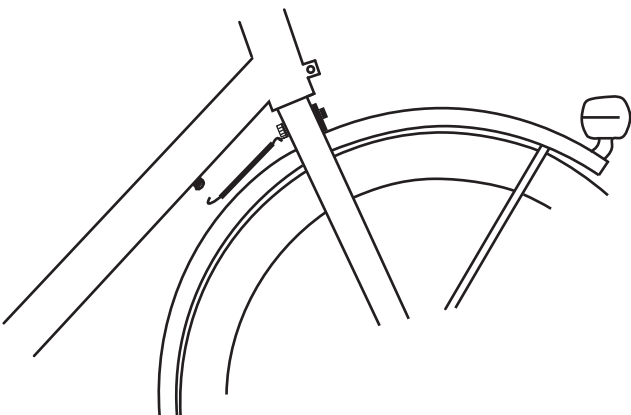


## Step 6: Attach fender stays

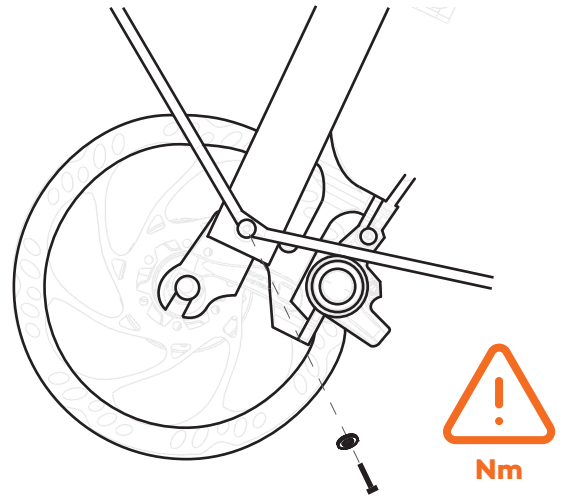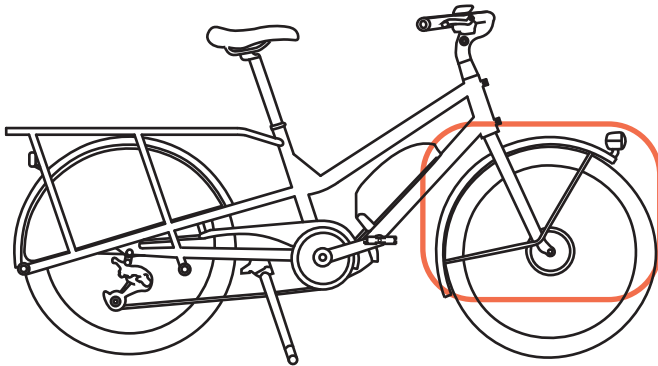


- 3** Torque: 6 Nm  
The screws and washers are in pocket E

## Step 7: Install Seat


Insert seat post to desired height and secure using seat post clamp

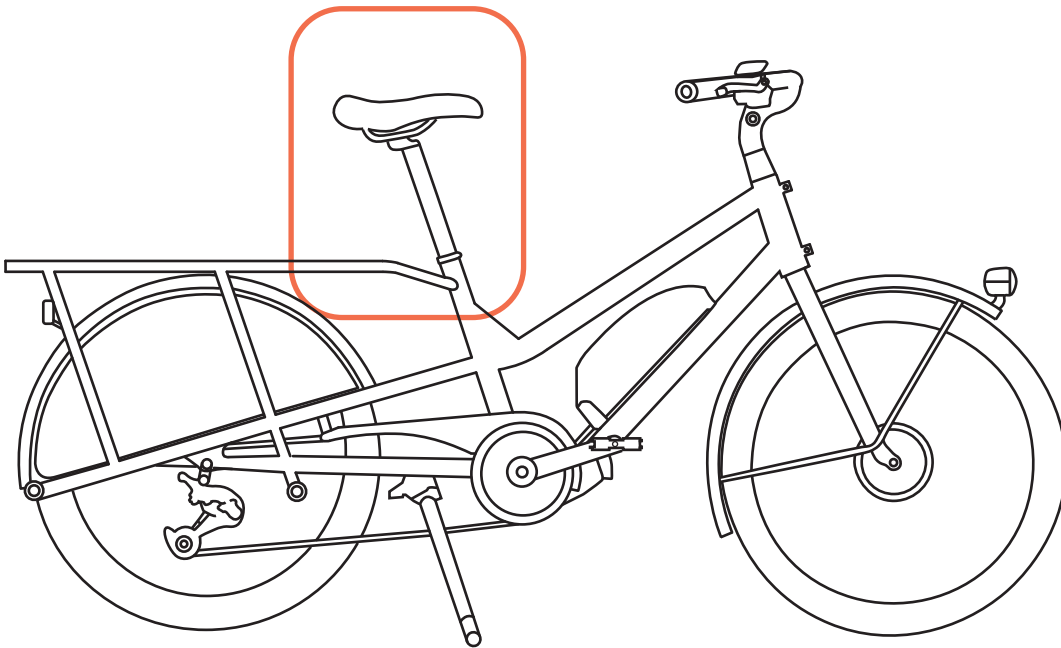

\*Recommended: Apply grease to the outside bottom edge of seat post

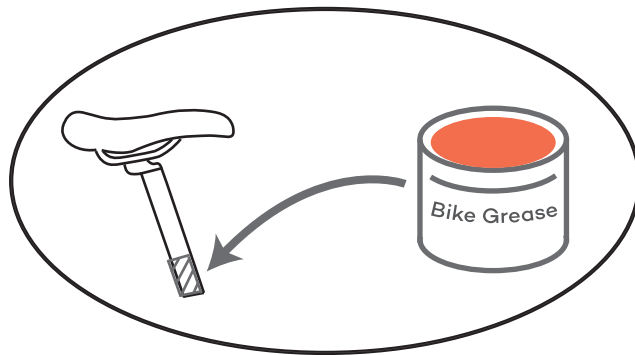


Seat clamp  
Tighten so the saddle does not move

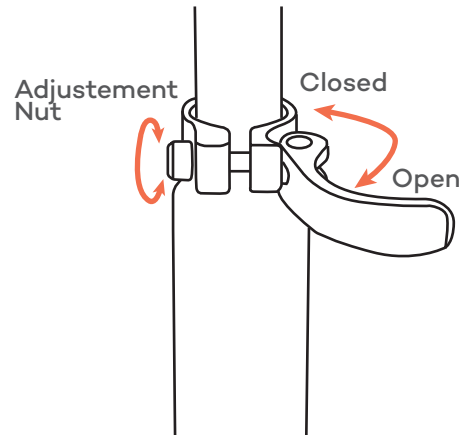


## Saddle Adjustment



Loosen the screw under the seat to adjust the seat's position and angle.

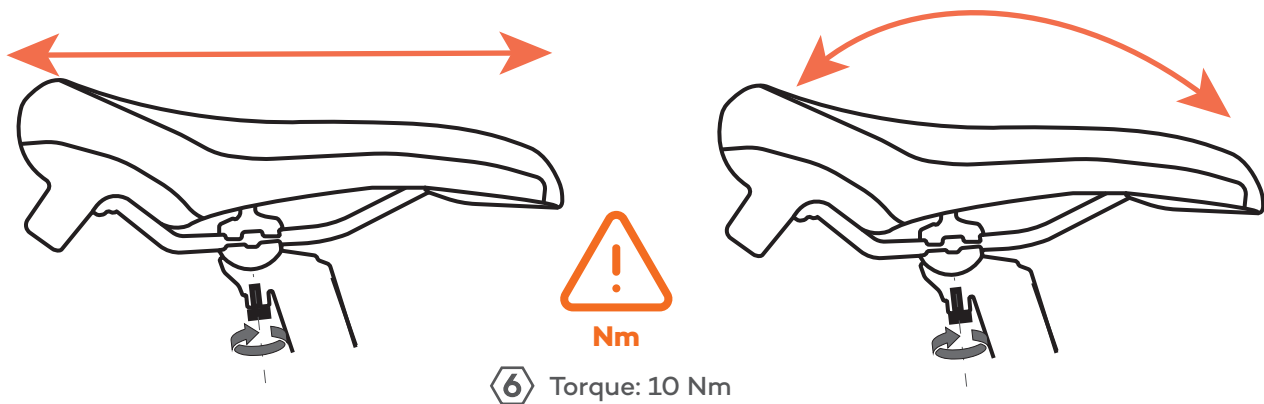

## Step 8 Install Pedals

Install pedals

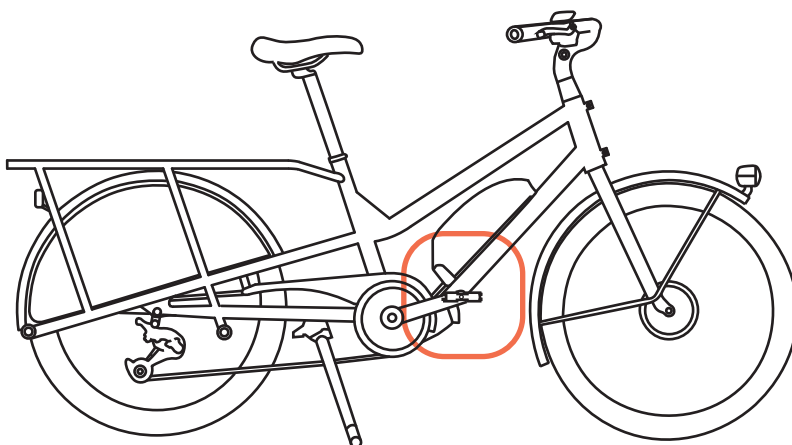

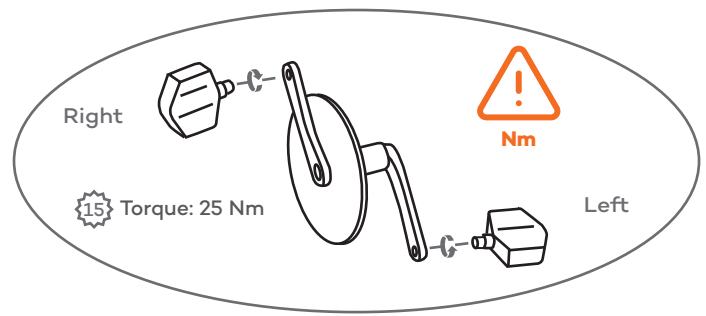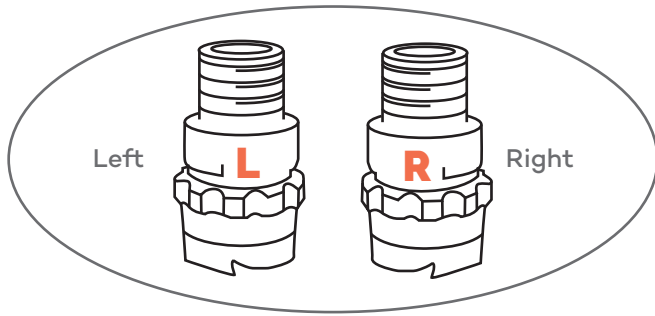


There is an L or R marked on each pedal to clarify between the left (L) and Right (R).



Add bicycle grease to pedal threads before installation

## Tyre Pressure

Refer to the information on the tires to find out the maximum pressure.


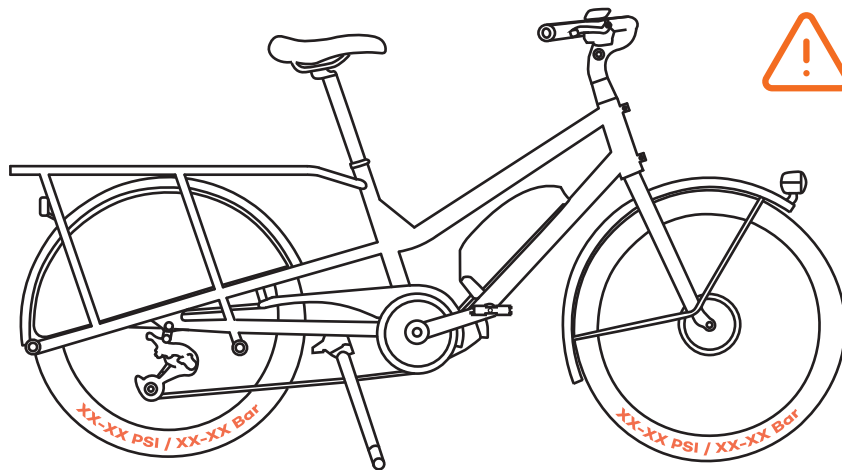


## Maximum load


Refer to the sticker on the bike to find out the maximum payload.



## Cockpit Command

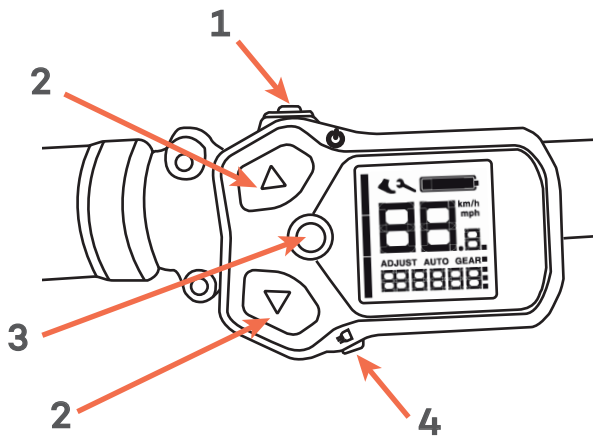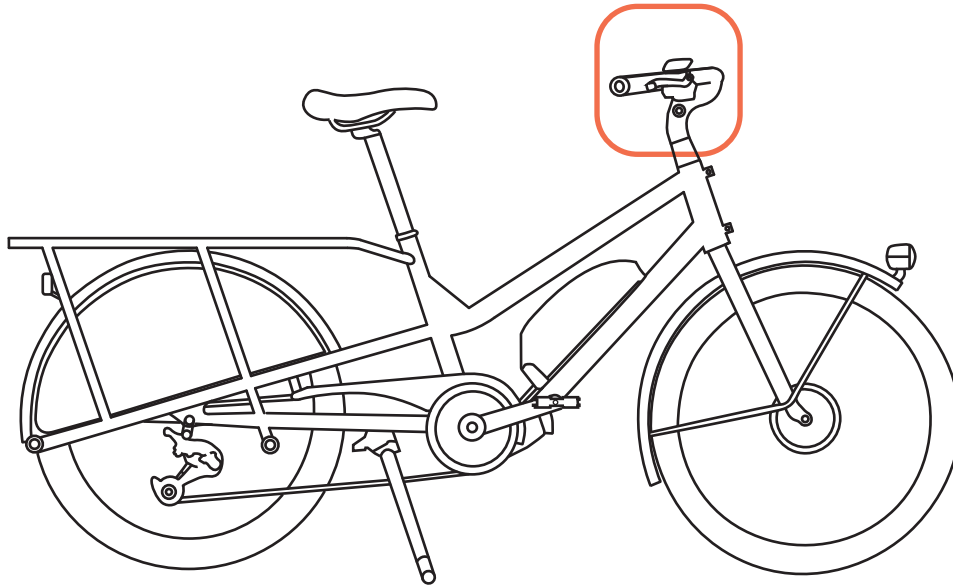

- 1** Power On/Off
- 2** Increase/decrease assistance
- 3** Display Change
- 4** Turning the lights on/off

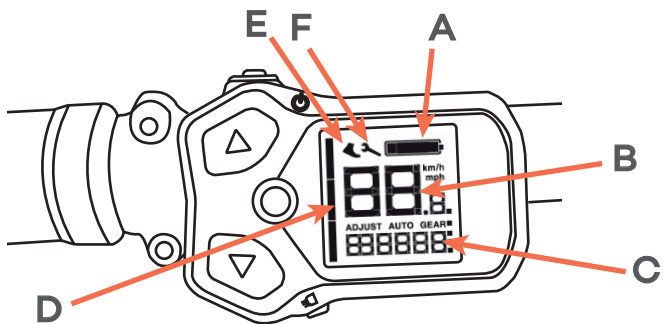

- A** Battery Level Indicator
- B** Current speed
- C** Data Display
- D** Electric Power Assist Gauge
- E** Walking Assistance Mode
- F** Maintenance Alert

### 3 Different displays:

|              |                     |
|--------------|---------------------|
| <b>GEAR</b>  | Current gear        |
| <b>RANGE</b> | Travel Range        |
| <b>DST</b>   | Distance traveled   |
| <b>ODO</b>   | Cumulative Distance |


### Most frequent error :

**W013** Torque sensor initialization error  
If an error occurs, turn the battery off and then back on, being careful not to have your foot on the pedal.

## Shifting gear


### Shift down

Press with your thumb to shift down — easy peasy, hills are nothing now!

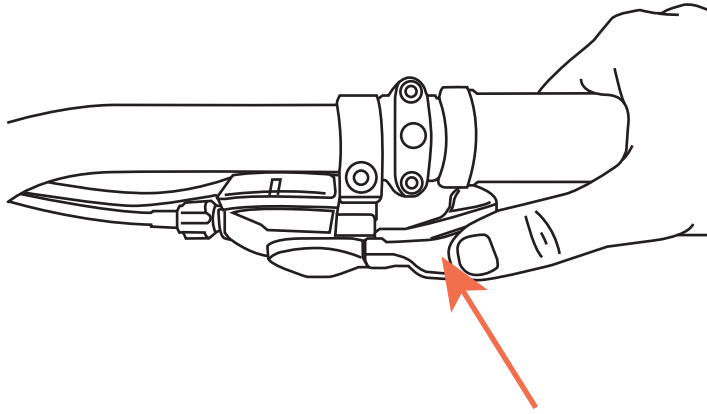


### Shift up

Pull with your index to shift up — time to speed up and show off!

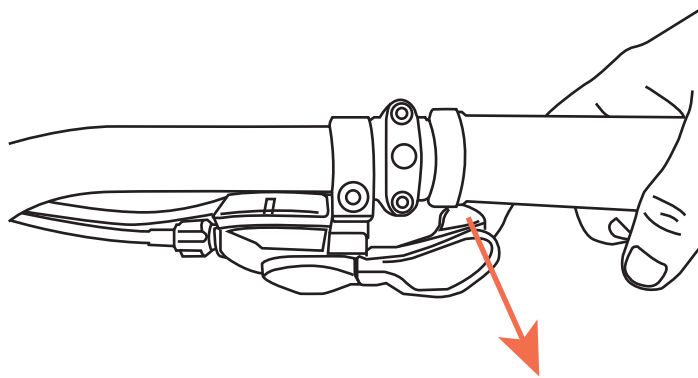


## Battery

Press this button to turn the battery on or off

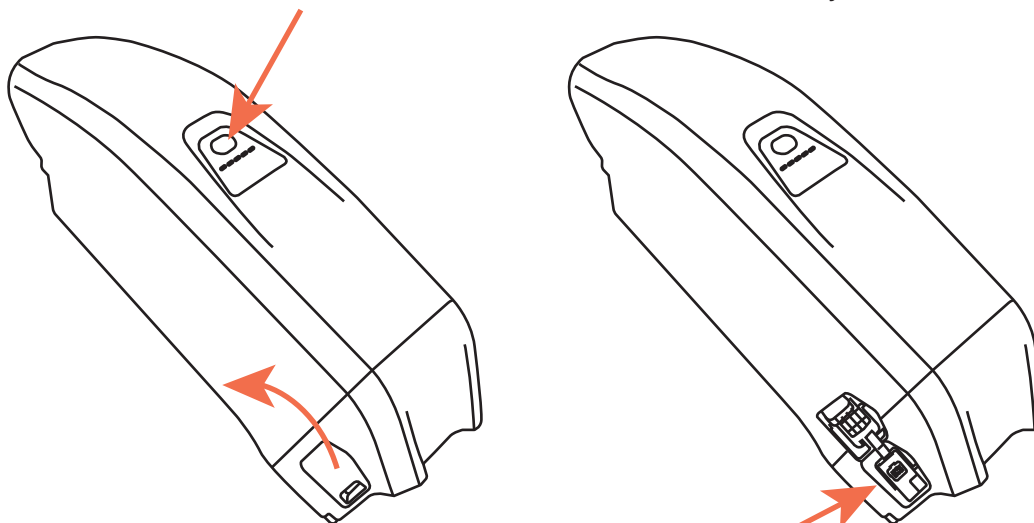


Open the plastic cover to charge the battery

Follow these steps to insert the battery. To remove the battery, repeat the process in reverse by inserting the key into the lock.

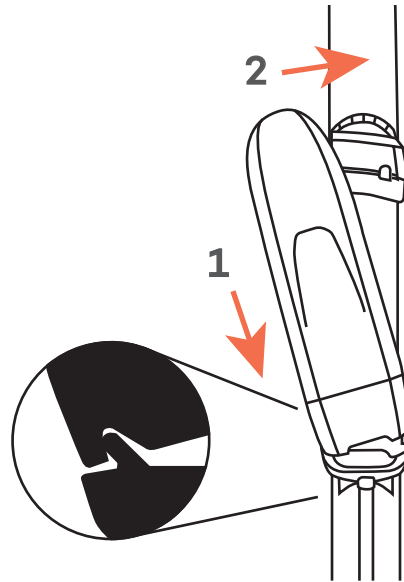


## Use the Kickstand

Place one foot on one of the kickstand's feet to anchor it to the ground, then gently pull the bike backward by the handlebars and the seat until it locks into a stable position.

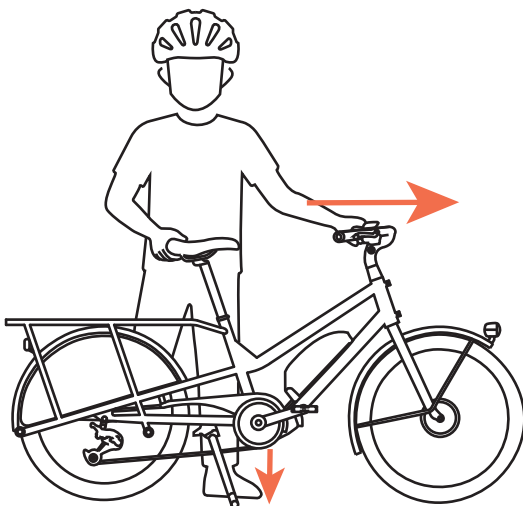


Grab the handlebars, place your foot in front of the kickstand, and then push the bike forward to raise the kickstand.

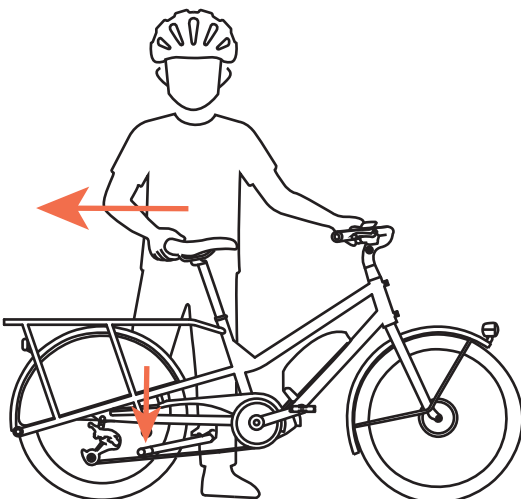


## Before each ride


Check and/or retighten wheel fastening system, pedals, bolts and nuts

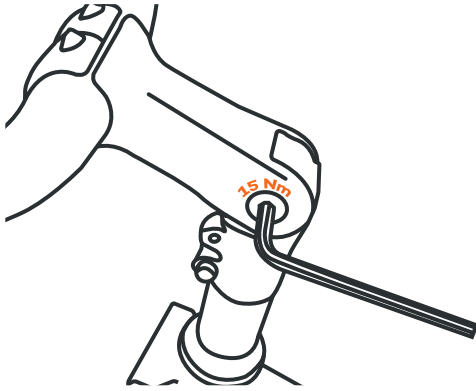


Check bike, tyre and all components for damage, wear and material fatigue

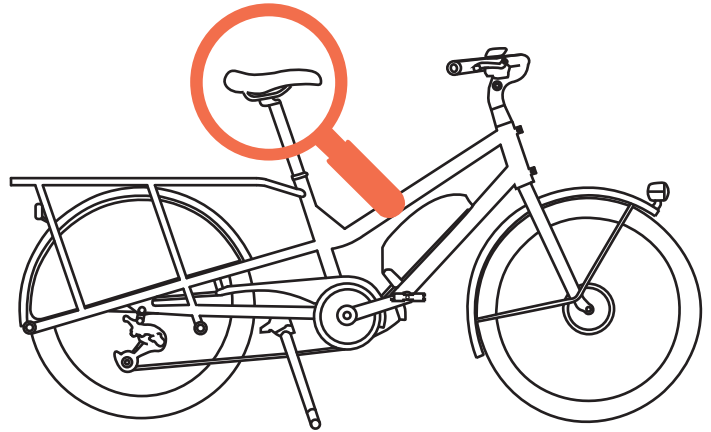


Test brake system, be aware of dirtiness especially residuals of lubrication or grease

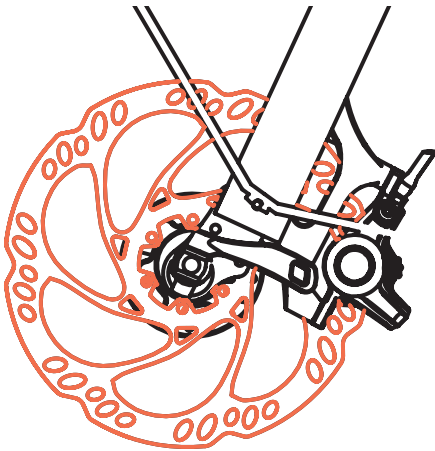

Check tyre pressure and alignment of valve stems

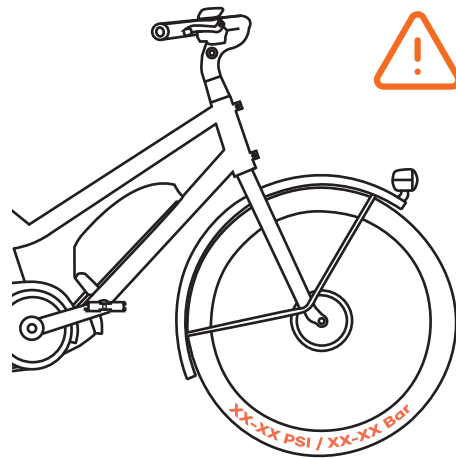

Check and/or lubricate chain

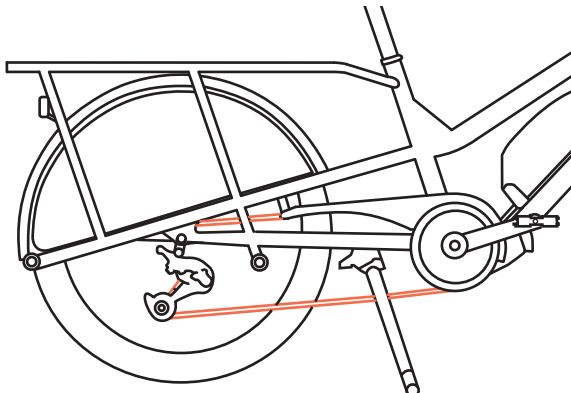

## Register your Bike



### Register your Kombi, ride worry-free

Secure your cargo bike's future by registering it today. This simple step gives you extra peace of mind against theft and unlocks our 15-year extended warranty. Scan the QR code or visit our website to register your serial number now.

(Terms and conditions apply).



yubabikes.eu  
yubabikes.com





